


# GREYSTONE ENERGY SYSTEMS INC



## AIR QUALITY CONTROLLER-MONITOR AIR4 Series



### Precision air quality control / sensing

#### FEATURES:

- True Air Quality Monitor
- Microprocessor based controller
- Linear and stepped analog output
- Optional relay output
- Optional temperature sensor
- LCD Display

*Peace of mind  
through reliable  
gas monitoring*

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM


## OPERATION

The AIR4, Indoor Air Quality (IAQ) Sensor uses an advanced MEMS metal oxide semiconductor sensor to detect poor air quality. The sensor reacts quickly to detect a broad range of VOCs such as smoke, cooking odors, bio-effluence, outdoor pollutants and from human activities. The sensor captures all VOC emissions that are completely invisible to CO2 sensors.

Extensive studies and research have shown that there is direct correlation between CO2 levels and VOC levels and the Air Quality Sensor has been calibrated to provide a "CO2-equivalent" ppm measurement value, thereby achieving full compatibility to existing HVAC CO2 ventilation standards. The sensor also includes control algorithms that correct sensor drift and aging and therefore provides a long-term consistent DCV solution while overcoming the deficiencies of CO2 measurement by detecting the true root-cause of ventilation demand, VOCs. The IAQ sensor emulates the human perception of air quality much more than a CO2 sensor and even detects odorless, potentially hazardous substances such as carbon monoxide.

The CO2-equivalent sensor output value was developed over a period of several years to allow the IAQ sensor to be optimized for Demand Controlled Ventilation applications.

The long-term IAQ sensor performance was monitored in various locations including offices, cafeterias, schools, production facilities, apartments and homes in direct comparison to infrared-absorption CO2 sensors. The data shows consistent results between measured CO2 values and the IAQ CO2-equivalent values and also highlight the poor air quality events detected by the IAQ sensor that the CO2 sensor misses. The above sample chart shows CO2 measurements vs. IAQ measurements.

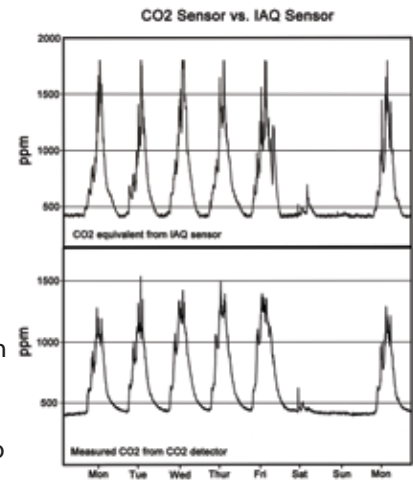

Typical Indoor Air VOC Contaminants		
Contamination Source	Emission Source	VOCs
Human Being	Breath	Acetone, Ethanol, Isoprene
	Skin Respiration and Perspiration	Nonanal, Decanal, $\alpha$ -Pinene
	Flatus	Methane, Hydrogen
	Cosmetics	Limonene, Eucalyptol
	Household Supplies	Alcohols, Esters, Limonene
Office Equipment Building Material Furniture Consumer Products	Combustion	Unburnt Hydrocarbons
	Printers, Copiers, Computers	Benzene, Styrene, Phenole
	Paint, Adhesive, Solvent, Carpet	Formaldehyde, Alkanes, Aldehydes, Ketones
	PVC (Poly Vinyl Chloride)	Toluene, Xylene, Decane

## SPECIFICATION:

Sensing Technology	MEMS metal oxide semiconductor VOC sensor
Measurement Range	450-2000 ppm CO2 equivalent or 0-100% (menu selectable)
Drift Compensation	Automatic baseline correction
Power Supply	20-28 Vac/dc (non-isolated half-wave rectified)
Consumption	35 mA max @ 24 Vdc
Input Voltage Effect	Negligible over specified operating range
Protection Circuitry	Reverse voltage protected, over voltage protected
Operating Conditions	0-50 °C (32-122 °F), 5-95 %RH non-condensing
Linear Output Signal	0-5 / 0-10 Vdc (menu selectable) = 0-2000 ppm CO2 equivalent
Analog Stepped Output Signal	Three steps representing Good, Fair and Poor air quality (each step is independently adjustable from 0-10 Vdc)
Output Drive Capability	10 K $\Omega$ minimum
Programming and Selection	Via internal push-buttons and LCD menu
Warm-up Time	5 minutes
LCD Resolution	1 ppm / 1 %
LCD Size	1.4" w x 0.6" h (35 x 15 mm) alpha-numeric 2 line x 8 characters
LCD Backlight	Enable or disable via menu
LED Display (Room Only)	Tri-color (Good = Green, Fair = Blue, Poor = Red), enable or disable via menu
Wiring Connections	Screw terminal blocks (14 to 22 AWG)
Enclosure	Room: White ABS, IP30 (NEMA 1) Duct: Grey ABS, UL94-5VB, IP65 (NEMA 4X)
Dimensions	Room: 84 w x 119 h x 29 d mm (3.3" w x 4.7" h x 1.15" d) Duct: 145 w x 100 h x 63 d mm (5.7" w x 3.95" h x 2.5" d) Duct Probe: 177 long x 25.4 Diameter mm (7" l x 1" d)
Weight	Room: 122 gm (4.3 oz) Duct: 290 gm (10.2 oz)
Override Switch (Room only)	Front panel switch with FET output, 30 Vdc @ 50 mA max
Relay Output	<b>Optional on Room, Standard on Duct</b> Form A contact (N.O.) 2 Amps @ 140 Vac, 2 Amps @ 30 Vdc (trip point and hysteresis set via menu)
Optional Temperature Sensor	Various thermistors and RTDs, 2-wire resistive output

## FEATURES:

- Measures total VOCs
- Direct correlation to CO2 levels
- High sensitivity and fast response
- 0 to 2000 ppm CO2 output signal
- Room or Duct models
- LCD to display air quality information
- Internal menu for easy setup
- Selectable 0-5 or 0-10 Vdc signal
- Analog stepped output for damper control
- Linear output for logging and control

## Room Features and Options

- Tri-color LED to indicate IAQ level
- Optional relay output with adj. setpoint
- Optional override switch output
- Optional resistive temperature sensors

## PRODUCT ORDERING INFORMATION (ROOM)

MODEL	Description
<b>AIR41</b>	Room Air Quality Monitor, 0-2000 ppm CO <sub>2</sub> Equivalent
<b>CODE</b>	<b>LCD Display</b>
<b>0</b>	Concealed
<b>1</b>	Viewable
<b>CODE</b>	<b>LED Indicator, Tri-color</b>
<b>0</b>	Concealed
<b>1</b>	Viewable
<b>CODE</b>	<b>Temperature Sensor (Leave blank if not required)</b>
<b>T2</b>	100 Ω Platinum RTD, IEC 751, 385 Alpha, thin film
<b>T5</b>	1801 Ω, NTC Thermistor, ±0.2 C
<b>T6</b>	3000 Ω, NTC Thermistor, ±0.2 C
<b>T7</b>	10,000 Ω, type 3, NTC Thermistor, ±0.2 C
<b>T8</b>	2.252K Ω, NTC Thermistor, ±0.2 C
<b>T12</b>	1000 Ω Platinum RTD, IEC 751, 385 Alpha, thin film
<b>T13</b>	1000 Ω Nickel RTD, Class B, DIN 43760
<b>T14</b>	10,000 Ω, type 3, NTC Thermistor, ±0.2 C c/w 11K shunt resistor
<b>T20</b>	20,000 Ω, NTC Thermistor, ±0.2 C
<b>T24</b>	10,000 Ω, type 2, NTC Thermistor, ±0.2 C
<b>CODE</b>	<b>Momentary Override</b>
-	No Override
<b>S</b>	Front panel push button momentary switch (NO)
<b>CODE</b>	<b>Relay Output</b>
-	No Relay
<b>R</b>	Relay
<b>AIR41</b>	<b>0 1 T7 S R</b>


Greystone Energy Systems Inc. reserves the right to make design modifications without prior notice.

## PRODUCT ORDERING INFORMATION (DUCT)


MODEL	Description
<b>AIR4200</b>	Duct Air Quality Monitor, 0-2000 ppm CO <sub>2</sub> Equivalent
<b>CODE</b>	<b>Temperature Sensor (Leave blank if not required)</b>
<b>T2</b>	100 Ω Platinum RTD, IEC 751, 385 Alpha, thin film
<b>T5</b>	1801 Ω, NTC Thermistor, ±0.2 C
<b>T6</b>	3000 Ω, NTC Thermistor, ±0.2 C
<b>T7</b>	10,000 Ω, type 3, NTC Thermistor, ±0.2 C
<b>T8</b>	2.252K Ω, NTC Thermistor, ±0.2 C
<b>T12</b>	1000 Ω Platinum RTD, IEC 751, 385 Alpha, thin film
<b>T13</b>	1000 Ω Nickel RTD, Class B, DIN 43760
<b>T14</b>	10,000 Ω, type 3, NTC Thermistor, ±0.2 C c/w 11K shunt resistor
<b>T20</b>	20,000 Ω, NTC Thermistor, ±0.2 C
<b>T24</b>	10,000 Ω, type 2, NTC Thermistor, ±0.2 C
<b>AIR4200</b>	<b>T7</b>

Greystone Energy Systems Inc. reserves the right to make design modifications without prior notice.

## DIMENSIONS:

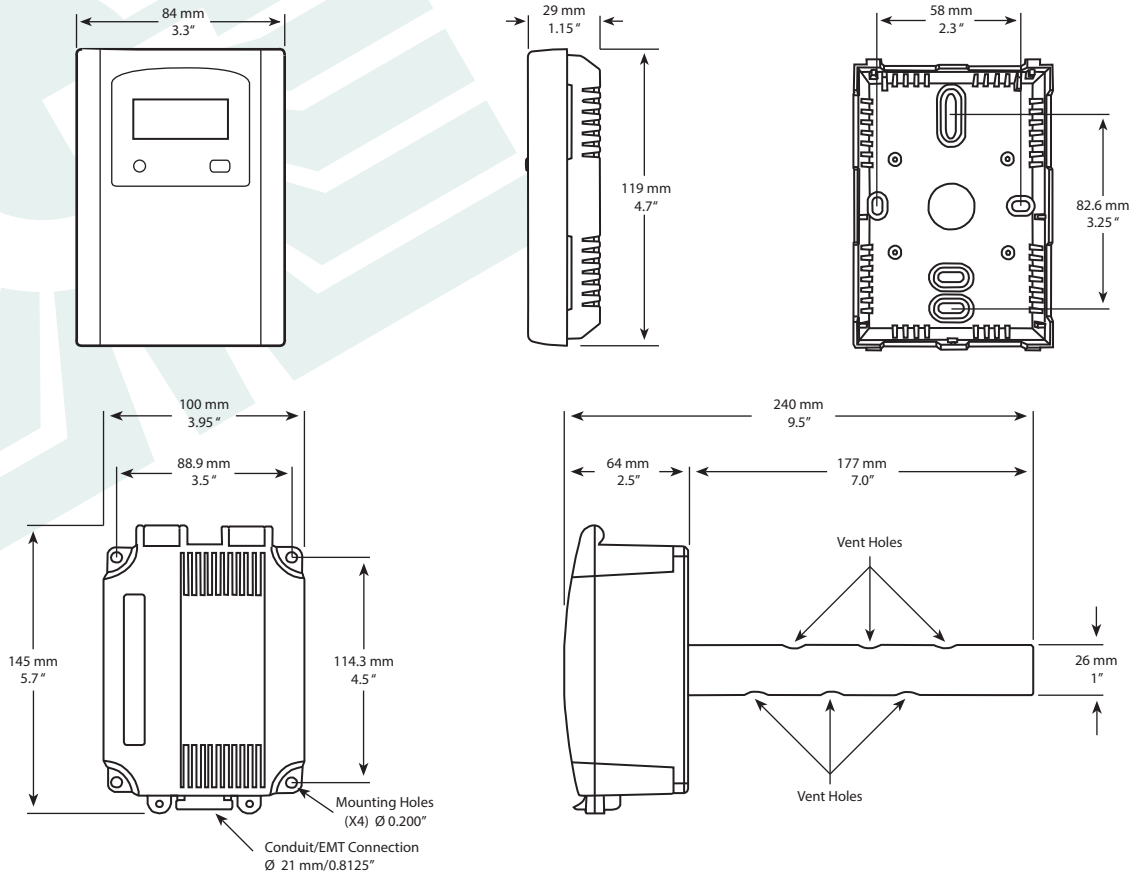


## PCB/WIRING INFORMATION

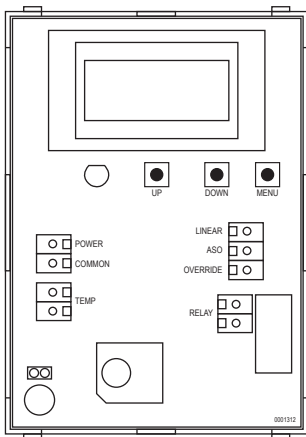

Terminal	Function
POWER	Power input
COMMON	Power & Signal Common
LINEAR	Analog Output 0-5 or 0-10 Vdc
ASO	Analog Stepped Output 0-10 Vdc
OVERVERRIDE	Digital Output (Room Only)
*TEMP	Resistive Temperature Sensor
*TEMP	Resistive Temperature Sensor
*RELAY	Relay Output
*RELAY	Relay Output

\* Terminals only present if option ordered

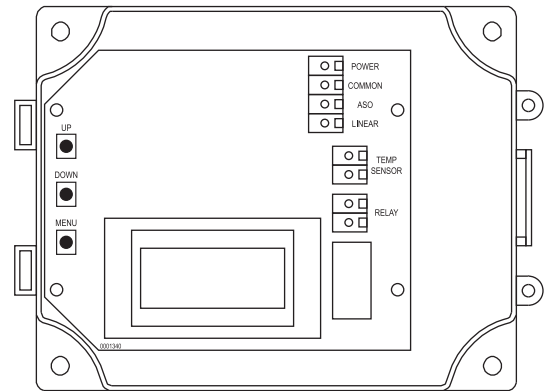

# GREYSTONE

ENERGY SYSTEMS INC

Greystone Energy Systems Inc.  
150 English Drive, Moncton,  
New Brunswick, Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014  
North America: 1-800-561-5611  
e-mail: mail@greystoneenergy.com  
web site: www.greystoneenergy.com

RoHS  
COMPLIANT



*Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.*

*We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.*

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM