

AUTO

106

Core temperature thermometer

testo 106 - The compact food thermometer

Ideal for use in the food sector

TopSafe: dishwasher-safe protective cover (IP67), protects from dirt and impact

Small, handy and always ready to hand

Audible and optical alarm

Automatic final value recognition (Auto-hold)

Hardly visible punctures

Certified according to EN 13485 (only in combination with TopSafe)




The core thermometer testo 106 is especially fast and robust. Its small handy shape means it is always close to hand and ready for use. Thanks to its very thin and robust measurement tip, it is excellently suited to core temperature checks in gastronomy, hotels, large kitchens, supermarkets etc. The dishwasher-safe TopSafe protects the instrument from dirt, water and impact. The testo 106 is comform to HACCP as well as EN 13485. If required, upper and lower limit values can be stored in the instrument; as soon as these values are violated, audible and optical warning signals are given. This alarm function and the automatic final value recognition facilitate measurement and support you in recognizing and interpreting measurement values quickly and correctly.



Technical data / Accessories

	Sensor type	NTC
to 106	Measuring range	-50 to +275 °C
106, food core thermometer incl. probe ting cap, battery and calibration protocol	Accuracy ±1 digit	±1 % of m.v. (+100 to +275 °C) ±0.5 °C (-30 to +99.9 °C) ±1 °C (-50 to -30.1 °C)
g cap, battery and calibration protocol	Resolution	0.1 °C
	General technical dat	a
Part no. 0560 1063	Storage temperature	-40 to +70 °C
	Operating temperature	-20 to +50 °C
	t ₉₉	10 s
	Battery type	3V button cell (CR 2032)
	Battery life	350 h
	Weight	80 g
106, food core thermometer incl. (waterproof protection case, IP67, nt clip, probe protection cap, battery	Dimensions Length Probe shaft / Probe shaft tip Diameter Probe shaft / Probe shaft tip	215 x 34 x 19 mm 55 mm / 15 mm Ø 3 mm / Ø 2.2 mm
ation protocol	Display	LCD, 1 line
563 1063	Housing material	ABS
	Protection class	IP 67 with TopSafe
	Warranty	2 years
	Standard	EN 13485
ories		Part no.

0516 8265
0554 0825
0520 0063
0520 0061
0520 0062
0520 0041
0520 0181

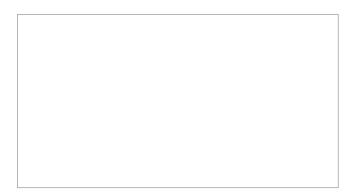

0981 9494/msp/I/06.2017